
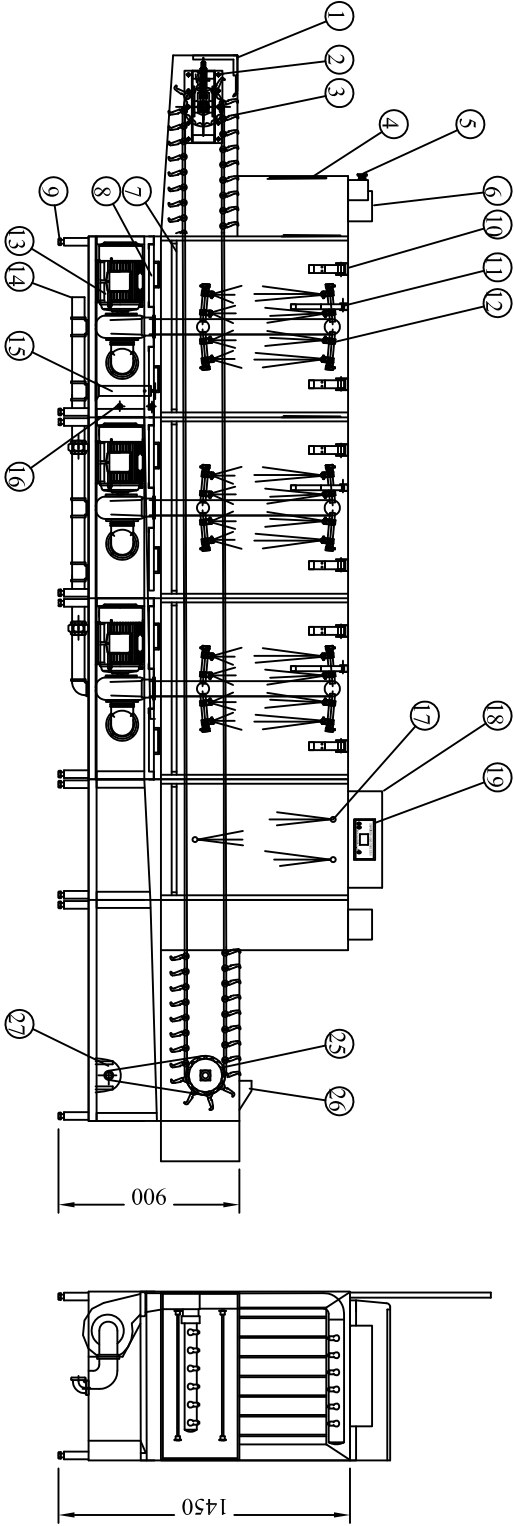


SPECIFICATION

Model	SJM-F3G	
Power	380/220V, 3PH, 28.35kw	
Size	5,500L x 870W x 1,450H	
Capacity	Dish 6,000ea/hr, Tray 2,000ea/hr	
Conveyor Speed	2.0 m/min	
Drive Motor	0.4 kw	
	Wash	2.2 kw x 3
Pump Motor	0.35 kw	
	E/Save	-
Blower Motor	-	
	Dry	-
Heater	5kw . 8 kw x 2	
	Tank	-
Temperature	-	
	60 ~ 65℃	
	81 ~ 92℃	
Pipe Conn.	20A(1.5 kg/cm <sup>2</sup> )	
	-	
	40A	
Wash Tank	105L x 3	
Using Water	14L/min	

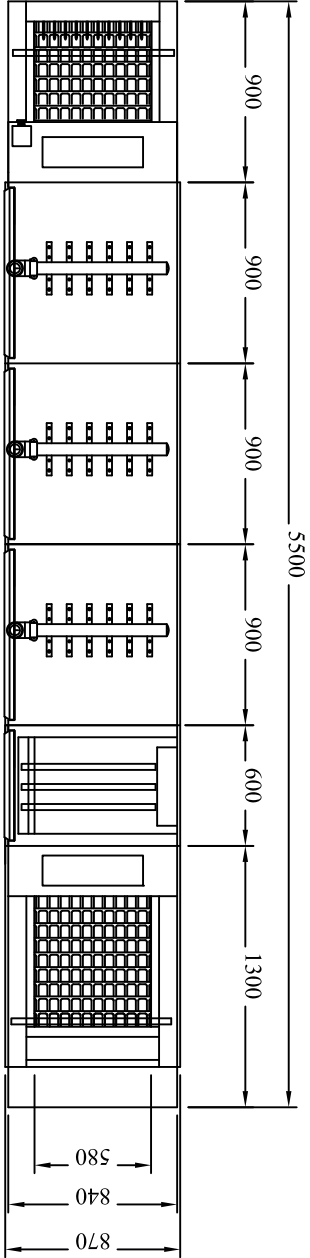

27	Conveyor Motor	0.4kw	
26	Stopper	sus304	
25	Sprocket	Plastic	
19	Controller	PCB/LCD	
18	Control Box	sus304	
17	Spray Nozzle	sus304	
16	Level Sensor	sus304	
15	Overflow Pipe	sus304	
14	Drain Pipe	40A	
13	Pump Motor	3Hp	
12	Wash Nozzle	Plastic	
11	Door Holder	sus304	
10	Door Spring	Plate spring	
9	Adjuster	M16 Bolt	
8	Strainer	#2.5 Punch	
7	Door	sus304	
6	Exhaust	sus304	
5	E.M.S	Push Button	
4	Curtain	P.E	
3	Flight Conveyor	Nylon/sus	
2	Tension Unit	sus304/M16	
1	Guide Plate	sus304	
No	Name	Q'ty	Mat'ial Remark

Title	SJM - F3G		
-------	-----------	--	--

Name	Outside view		Drawn by y.j.park
Scale	1/1	Date 10. 4. 23	Checked by

<b>SJM</b> SHIN JIN MASTER CO.,LTD	Approved by	Dwg. No	SF3-1004531
------------------------------------	-------------	---------	-------------